...connecting to the aftermarket

# CT23KI17

## Kia Double Din Fascia Plate



## Vehicle Application

Kia Pro-Cee'd 2009 - 2013
Kia Cee'd 2009 - 2013

## Key Features

- This fascia kit allows the installation of an aftermarket head unit into a non din sized aperture
- High quality finish designed to match the vehicle dashboard
- Fascia kit supplied with cage and fitting accessories

www.connects2.com

Designed and Engineered in the UK.

*The information provided in this document is subject to change without notice due to changes and/or improvements to the product/s.*

## ABOUT THIS PRODUCT

**CT23KI17**

Kia Double Din Fascia Plate (Black)

## INSTALLATION KIT INCLUDES

1x Metal Frame
1x Installation Material
1x Fascia Panel

## PRIOR TO INSTALLATION

*Read the manual prior to installation. Technical knowledge is necessary for installation. The place of installation must be free of moisture and away from heat sources. Please ensure that the correct tools are using during the installation to avoid damage to the vehicle or product.* ***Connects2 can not be held responsible for the installation of this product.***

## TECHNICAL SUPPORT

Connects2 Ltd. want to provide a fast and suitable resolution to any problems encountered during installation of this product. To get in touch with our dedicated technical support team, please fill in a ticket at **support.connects2.com** and provide as much information as possible.


FOLLOW US ON SOCIAL MEDIA
for all the latest updates

/CONNECTS2
Watch us on **YouTube**

/CONNECTS2
Like us on **facebook**

CONNECTS2LTD
Follow us on **instagram**

@CONNECTS2
Follow us on **twitter**

CONNECTS2LTD
Follow us on **linkedin**

CONNECTS2BLOG.COM
Follow our blog on **wordpress**

## FITTING GUIDE

**1.** Kia cee'd with OEM-head unit



**2.** Unclip OEM-bezel
(we recommend to use a plastic wedge)




**3.** Remove OEM-bezel by pulling towards your direction




**4.** Remove 4 screws (see arrows) Remove OEM head unit




**5.** Place metal frame and fix it with original screws (see arrows)

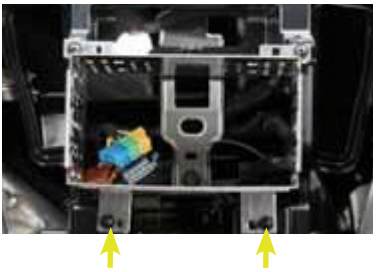

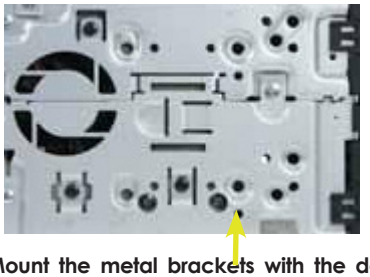

Mount the metal brackets with the double DIN head unit

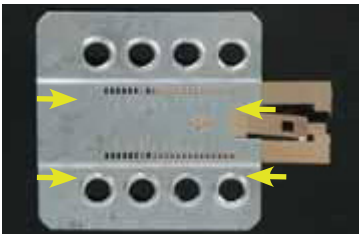

The position of the copper coloured holder can be adjusted to your needs for perfect fit. (see sample)

**6.** Push double DIN head unit into metal frame until it snaps in



**7.** Push facia plate from behind to OEM bezel



**8.** Install everything in reverse order to finish installation

